

# TUNA<sup>®</sup> Sprinklers



## Pendent Series

Model: NX025/ NX026 (New)

Standard Spray, Standard Response & Quick Response,  
5mm & 3mm Bulb Type, K5.6, 1/2" Connecting Thread

UL approved TUNA<sup>®</sup> Standard Spray Pendent Sprinklers are glass-bulb types designed for use in fire sprinkler systems and for use in various commercial applications.


TUNA<sup>®</sup> Pendent Sprinklers new type launched in year 2019, with two response model series (NX025-standard response & NX026-quick response) are available with a variety of temperature ratings and finishes to meet different design requirements.

### Model Types


#### NX025 Standard Response



#### NX026 Quick Response

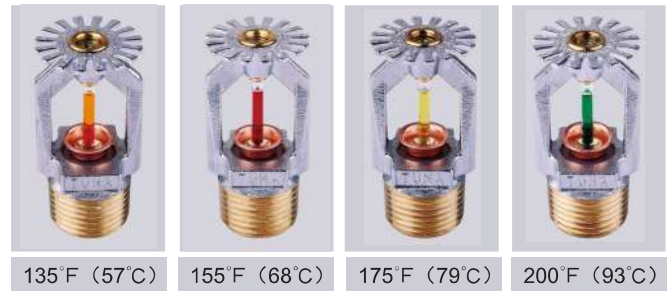

### Specification

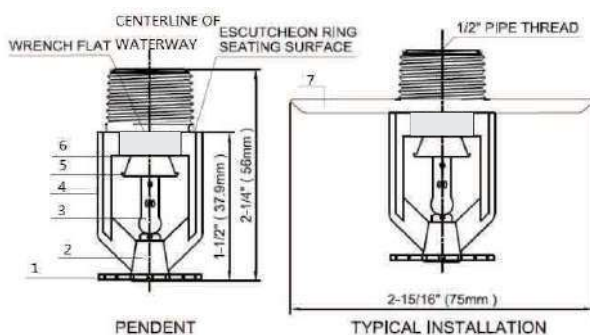

- 1 SSP Deflector; 2 Set Screw; 3 Glass Bulb;  
4 Frame; 5 Button; 6 Spring Seal;  
7 Standard Escutcheon

| Model                        | NX025                                                                                                                                                    | NX026                |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Style                        | Pendent Sprinkler                                                                                                                                        |                      |
| Bulb Nominal Dia. & Response | Ø5mm, Standard Response                                                                                                                                  | Ø3mm, Quick Response |
| Thread Size                  | <input type="checkbox"/> NPT1/2 or <input type="checkbox"/> R1/2                                                                                         |                      |
| Nominal Orifice Size         | 1/2 Inch                                                                                                                                                 |                      |
| Nominal K-Factor             | 5.6 (U.S.) / 80 (metric)                                                                                                                                 |                      |
| Max. Working Pressure        | 175 psig / 1.2 MPa (12 bar)                                                                                                                              |                      |
| Sprinkler Finish             | <input type="checkbox"/> Natural Brass or <input type="checkbox"/> Chrome Plated                                                                         |                      |
| Nominal Temp. Rating         | <input type="checkbox"/> 135°F/57°C or <input type="checkbox"/> 155°F/68°C or <input type="checkbox"/> 175°F/79°C or <input type="checkbox"/> 200°F/93°C |                      |
| Max. Ambient Temp.           | 135°F, 155°F: 100°F(38°C)<br>175°F, 200°F: 150°F(65°C)                                                                                                   |                      |
| Listings and Approvals       | UL/FM                                                                                                                                                    |                      |

## Sprinklers, Automatic and Open

### COMPANY

**Nanjing TUNA Fire Protection Co Ltd**

599 ZHUSHAN RD

JIANGNING DISTRICT

NANJING, Jiangsu 211112 China

EX6430

Trademark and/or Tradename: **TUNA**

Note: For additional marking information, refer to the [Guide Information Page](#).

*View model for additional information*

**Glass Bulb Type**, SIN(s): [NX001](#), [NX002](#), [NX003](#), [NX004](#), [NX005](#), [NX006](#), [NX007](#), [NX008](#), [NX017](#), [NX018](#), [NX021](#), [NX022](#), [NX023](#), [NX024](#), [NX025](#), [NX026](#)

Last Updated on 2024-05-20

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL Solutions' Follow - Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL Solutions' Follow - Up Service. Always look for the Mark on the product.

UL Solutions permits the reproduction of the material contained in Product iQ subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from Product iQ with permission from UL Solutions" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "©2024 UL LLC."

Sprinklers | Non-Storage Sprinklers | **Non-Storage Sprinklers**

## NX025

### Details

|                               |                                                    |
|-------------------------------|----------------------------------------------------|
| <b>Category</b>               | Non-Storage Sprinklers                             |
| <b>Class of Work</b>          | 2017 - AS, Control Mode, Pendent                   |
| <b>Approval Standard</b>      | FM 2000 - Automatic Sprinklers for Fire Protection |
| <b>Certification Type</b>     | FM Approved                                        |
| <b>K</b>                      | 5.6                                                |
| <b>K (metric)</b>             | 80                                                 |
| <b>Coverage Type</b>          | Standard                                           |
| <b>Type</b>                   | Pendent                                            |
| <b>Response</b>               | SR - Standard Response                             |
| <b>Element</b>                | 5 mm                                               |
| <b>NPT (in.)</b>              | 1/2                                                |
| <b>Finish</b>                 | Brass, Chrome                                      |
| <b>Temp. Rating (°F)</b>      | 135, 155, 175, 200                                 |
| <b>Temp. Rating (°C)</b>      | 57, 68, 79, 93                                     |
| <b>Sprinkler Category</b>     | Non Storage                                        |
| <b>Use with Vacuum System</b> | No                                                 |
| <b>Grooved Connection</b>     | No                                                 |
| <b>Listing Country</b>        | China                                              |

### Company

Nanjing Fire Protection  
Technology Co Ltd  
599 Zhushan Rd, Jiangning  
District, Nanjing 211112, China

Sprinklers | Non-Storage Sprinklers | **Non-Storage Sprinklers**

## NX026

### Details

|                               |                                                    |
|-------------------------------|----------------------------------------------------|
| <b>Category</b>               | Non-Storage Sprinklers                             |
| <b>Class of Work</b>          | 2017 - AS, Control Mode, Pendent                   |
| <b>Approval Standard</b>      | FM 2000 - Automatic Sprinklers for Fire Protection |
| <b>Certification Type</b>     | FM Approved                                        |
| <b>K</b>                      | 5.6                                                |
| <b>K (metric)</b>             | 80                                                 |
| <b>Coverage Type</b>          | Standard                                           |
| <b>Type</b>                   | Pendent                                            |
| <b>Response</b>               | QR - Quick Response                                |
| <b>Element</b>                | 3 mm                                               |
| <b>NPT (in.)</b>              | 1/2                                                |
| <b>Finish</b>                 | Chrome, Brass                                      |
| <b>Temp. Rating (°F)</b>      | 135, 155, 175, 200                                 |
| <b>Temp. Rating (°C)</b>      | 57, 68, 79, 93                                     |
| <b>Sprinkler Category</b>     | Non Storage                                        |
| <b>Use with Vacuum System</b> | No                                                 |
| <b>Grooved Connection</b>     | No                                                 |
| <b>Listing Country</b>        | China                                              |

### Company

Nanjing Fire Protection  
Technology Co Ltd  
599 Zhushan Rd, Jiangning  
District, Nanjing 211112, China